



Product Description

The QPM2637 is a Gallium Nitride MMIC front-end module (FEM) designed for X-Band radar applications within the 9-10.5 GHz range. The MMIC combines a T/R switch, low-noise amplifier, and a power amplifier. The receive path has dual-outputs which offer 21dB gain and 2.7dB noise figure. The transmit path delivers 4W of saturated power with 23dB large signal gain. The FEM is a high robustness device with up to 4W of input power into the ANT port eliminating the need for a limiter.

The QPM2637 is fabricated on Qorvo's QGaN25 0.25um GaN-on-SiC process. The air-cavity EHS (embedded copper heat slug) surface mount package, coupled with a low thermal resistance die-attach process, allows the QPM2637 to perform well at extreme case temperatures. Its compact size supports tight lattice spacing requirements needed for X-Band phased array radar applications.

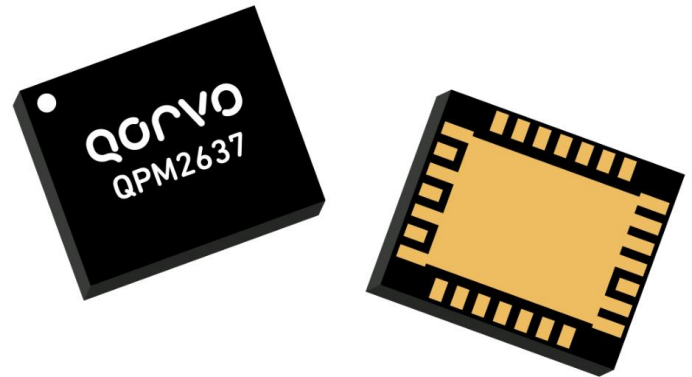

Functional Block Diagram

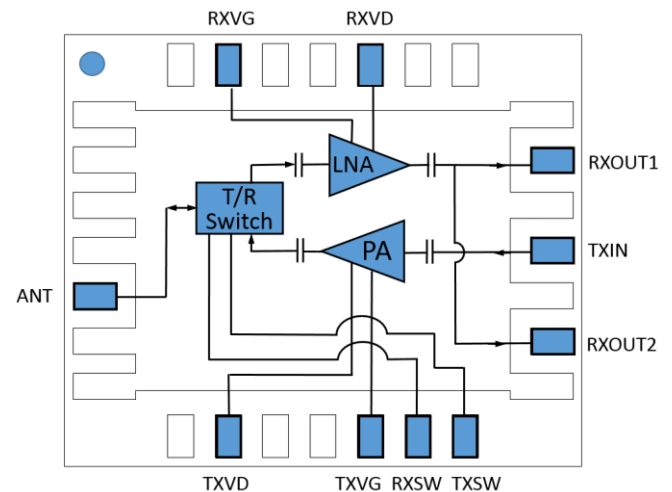

Product Features

- Frequency Range: 9 – 10.5 GHz
- RX Noise Figure: 2.7 dB
- RX Small Signal Gain: 21 dB
- RX OTOI : 21 dBm
- TX Large Signal Gain: 23 dB
- TX Saturated Power: 36 dBm, Pulsed
- TX PAE: 38% @ 36 dBm Pout, Pulsed
- Package Dimensions: 6 x 5 x 1.8 mm

*Performance is typical at room temperature.
Please reference electrical specification table and data plots for more details.*

Applications

- Electronics Warfare (EW)
- Commercial and Military Radar
- Communications

Ordering Information

Part No.	Description
QPM2637	QPM2637, Shipping Tray, Qty 10
QPM2637S2	QPM2637, Sample Bag, Qty 2
QPM2637SR	QPM2637, Tape and Reel, Qty 100
QPM2637TR7	QPM2637, Tape and Reel, Qty 750
QPM2637EVB	QPM2637 Evaluation Board

Normal Operating Conditions

Parameter	Value
RX Drain Voltage (RXVD)	10 V
RX Drain Quiescent Current (RXIDQ)	30 mA
RX Gate Control (RXVG)	-2.5 V
TX Drain Voltage (TXVD)	28 V
TX Drain Quiescent Current (TXIDQ)	50 mA
TX Gate Voltage (TXVG)	-2.5 V
TX Gate Current (TXIDQ)	25 mA
Control Voltage (TXSW / RXSW)	0V or -28V
Operating Temperature Range	-55 to 100 °C

Gate voltage shown are typical, can be adjusted to set required drain current. Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications, Receive

Test conditions unless otherwise noted: 25 °C, RXVD = 10 V, RXIDQ = 30 mA, RXSW = -28 V, TXSW = 0 V, PA off.
Data de-embedded to device reference plane

Parameter	Min	Typical	Max	Units
Frequency	9		10.5	GHz
Small Signal Gain		21		dB
Noise Figure		2.7		dB
Input Return Loss		10		dB
Output Return Loss		23		dB
Output TOI		21		dBm
Gain Temperature Coefficient		-0.038		dB/°C

Electrical Specifications, Transmit







Test conditions unless otherwise noted: 25 °C, TXVD = 28 V, TXIDQ = 50 mA, RXSW = 0 V, TXSW = -28 V, LNA off.
Data de-embedded to device reference plane

Parameter	Min	Typical	Max	Units
Frequency	9		10.5	GHz
Large Signal Gain		23		dB
Input Return Loss		15		dB
Output Return Loss		8		dB
Saturated Output Power ¹		36		dBm
PAE at Saturated Power (@13dBm Pin)		42		%
Harmonic Suppression up to Saturated Power		30		dBc
Gain Temperature Coefficient		-0.045		dB/°C

1. Power and PAE measured with DC drain pulsed, PW = 200 uS, Duty Cycle = 10%







Performance Plots, Receive Channel

Test Conditions unless otherwise stated: RXVD = 10 V, RXIDQ = 30 mA, RXSW = -28 V, TXSW = 0 V, PA off, 25C
Data de-embedded to device reference plane, Port 1: Common Port, Port 2: RXOUT1, Port 3: RXOUT2

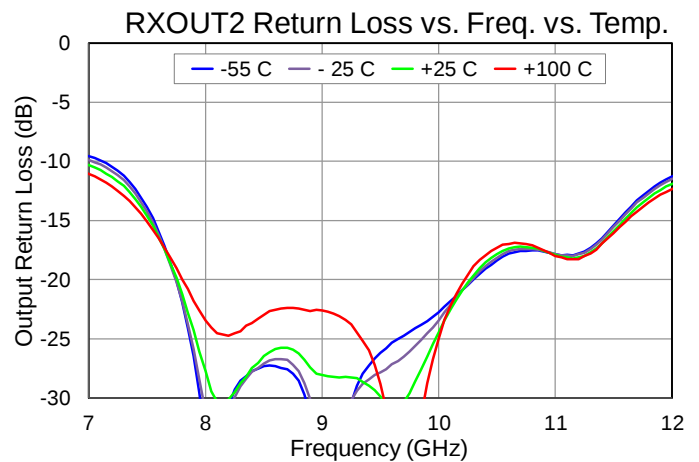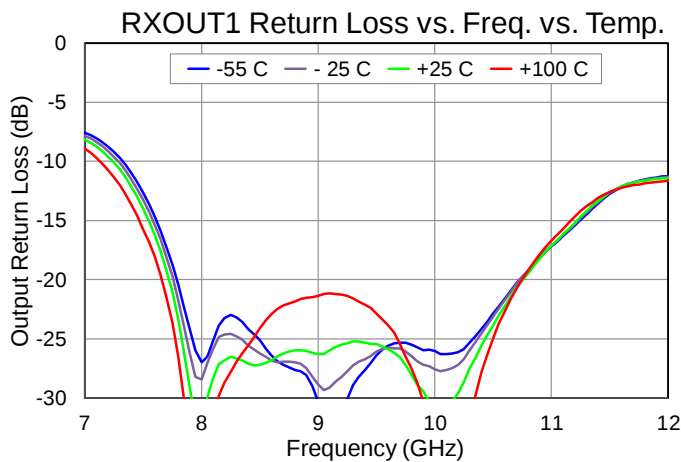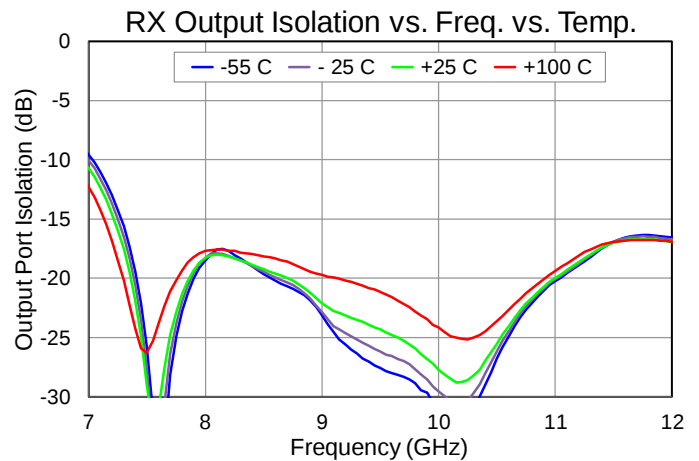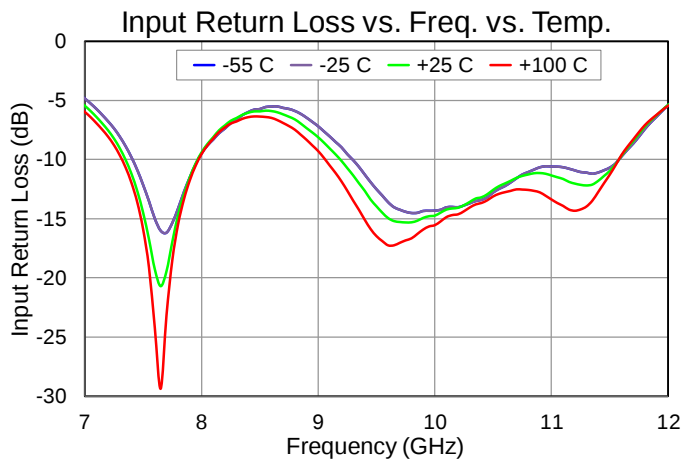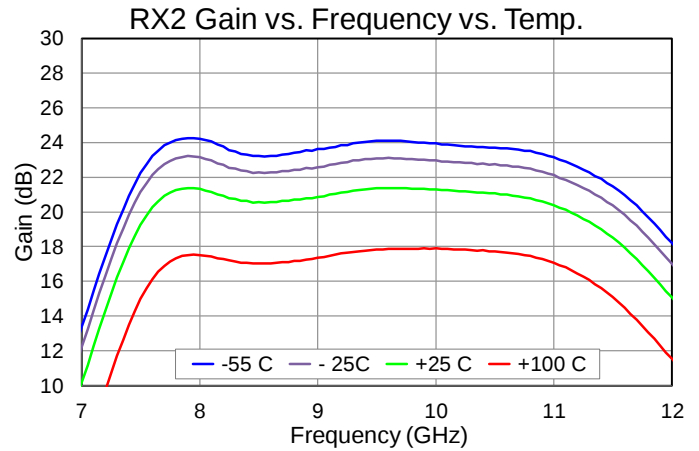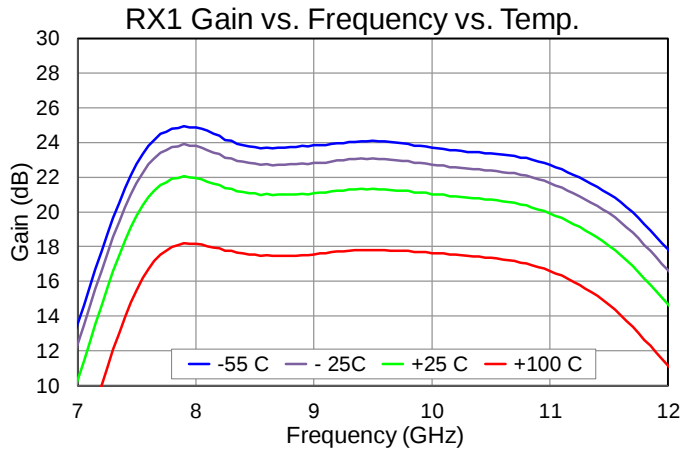






Performance Plots, Receive Channel

Test Conditions unless otherwise stated: RXVD = 10 V, RXIDQ = 30 mA, RXSW = -28 V, TXSW = 0 V, PA off, 25C
Data de-embedded to device reference plane, Port 1: Common Port, Port 2: RXOUT1, Port 3: RXOUT2

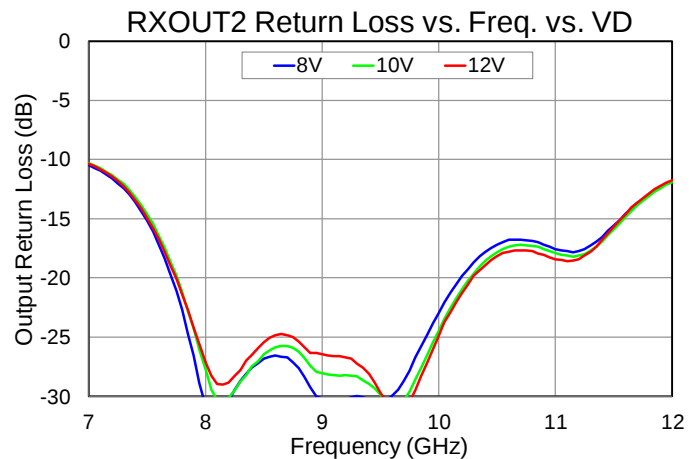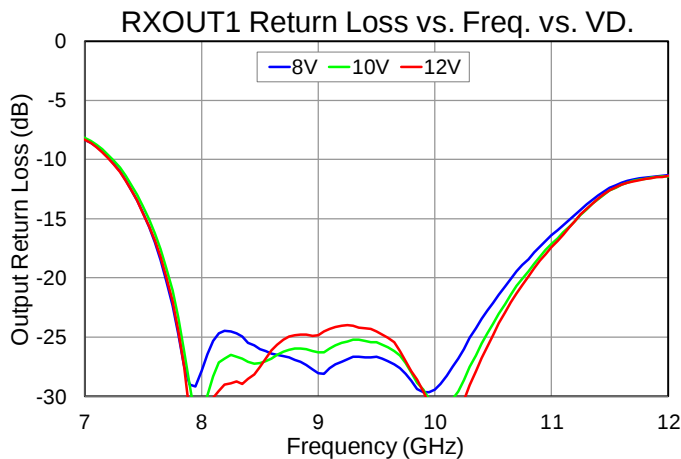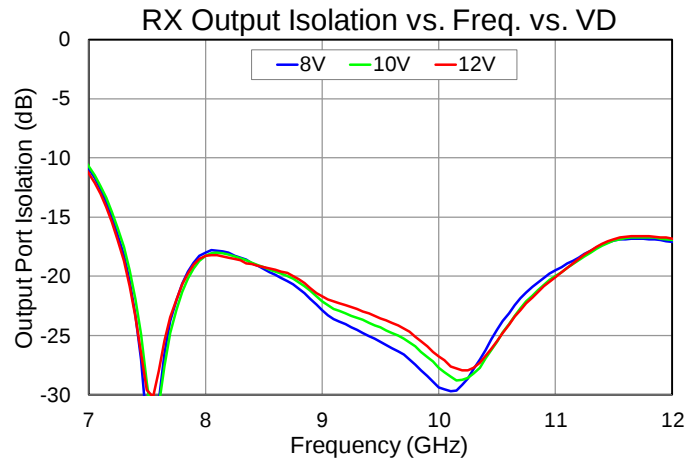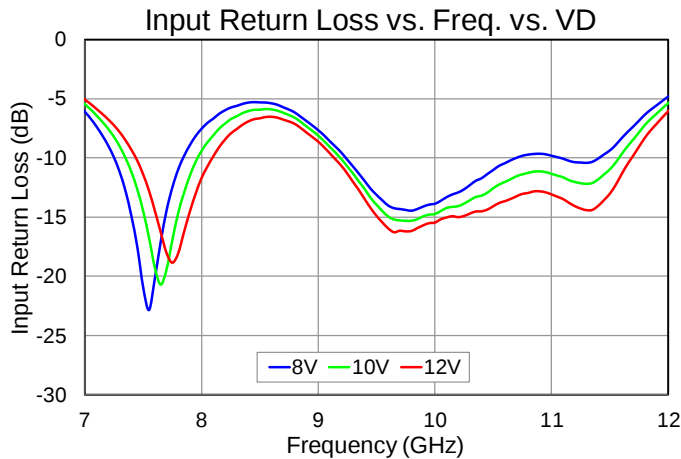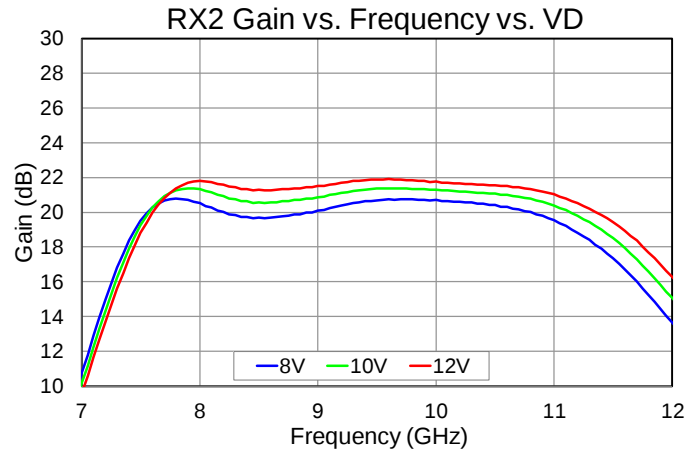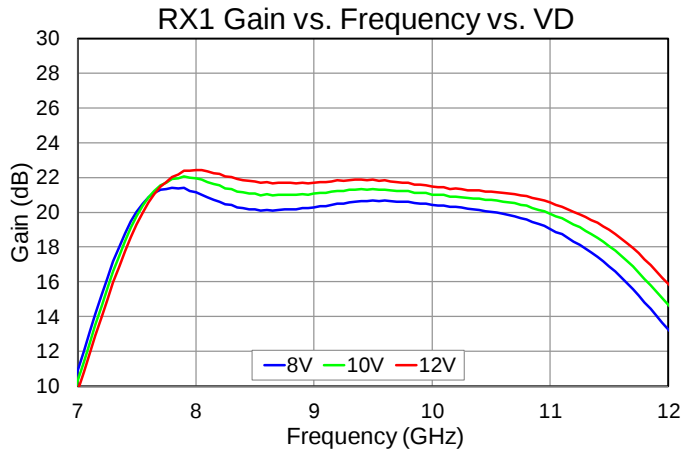






Performance Plots, Receive Channel

Test Conditions unless otherwise stated: VD = 10 V, RXIDQ = 30 mA, RXSW = -28 V, TXSW = 0 V, 10 MHz tone spacing, Pin = -20 dBm, PA off. Data de-embedded to device reference plane, 25C

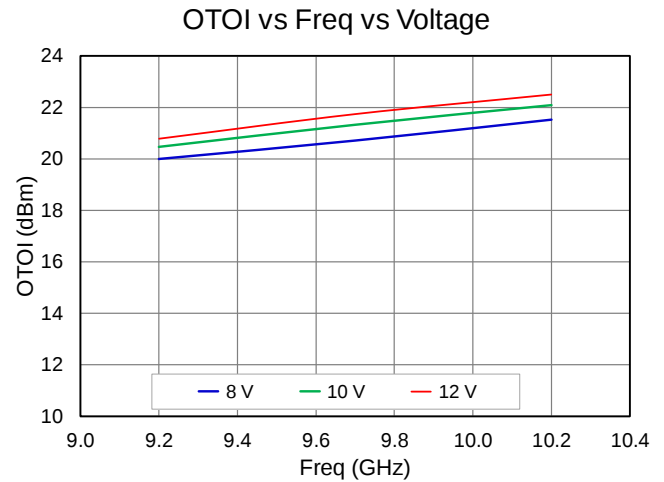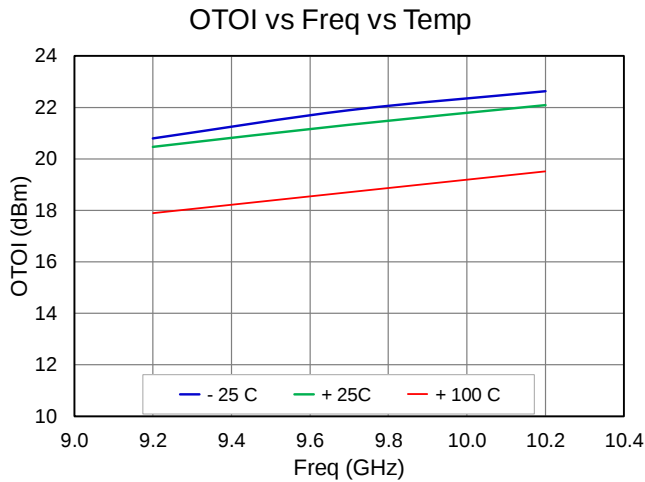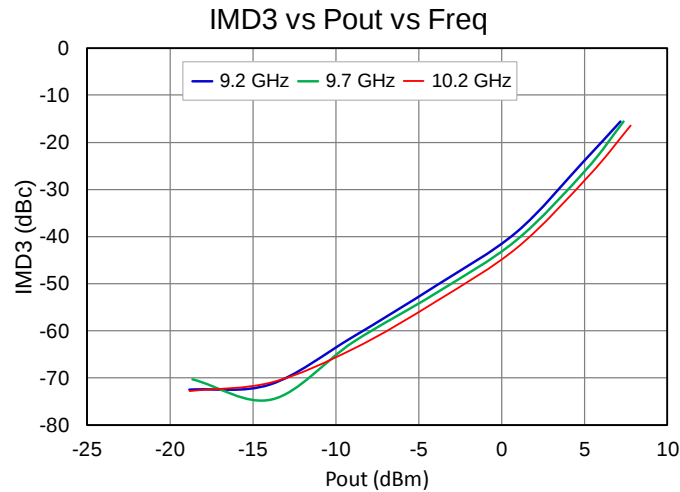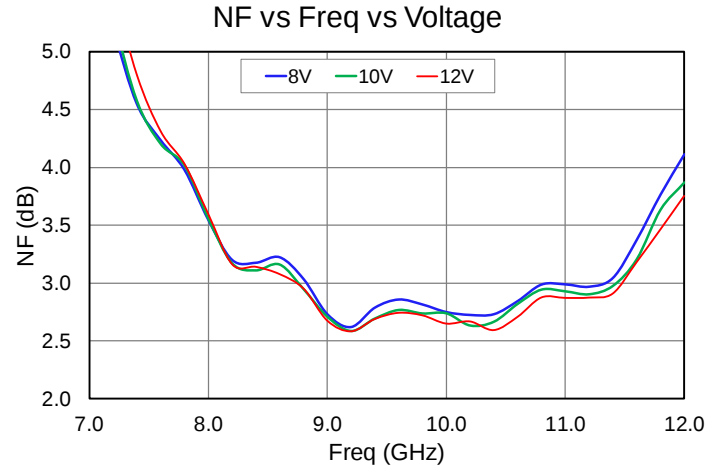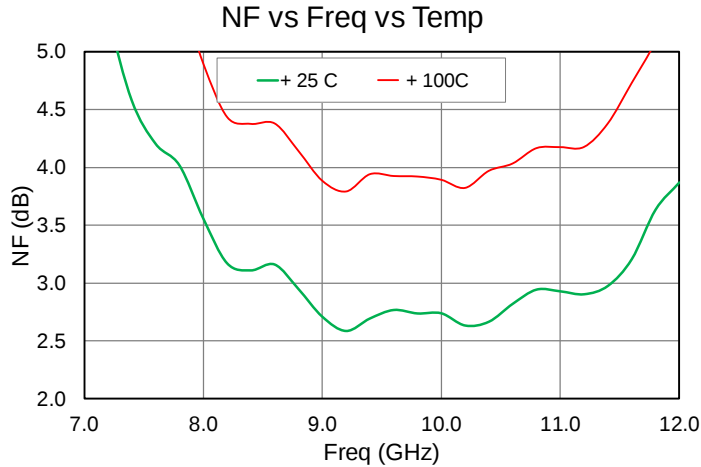





Performance Plots, Receive Channel

Test Conditions unless otherwise stated: $V_D = 10\text{ V}$, $R_{XIDQ} = 30\text{ mA}$, $P_{in} = 5\text{ dBm}$, $R_{XSW} = -28\text{ V}$, $T_{XSW} = 0\text{ V}$, PA off
Data de-embedded to device reference plane, 25°C

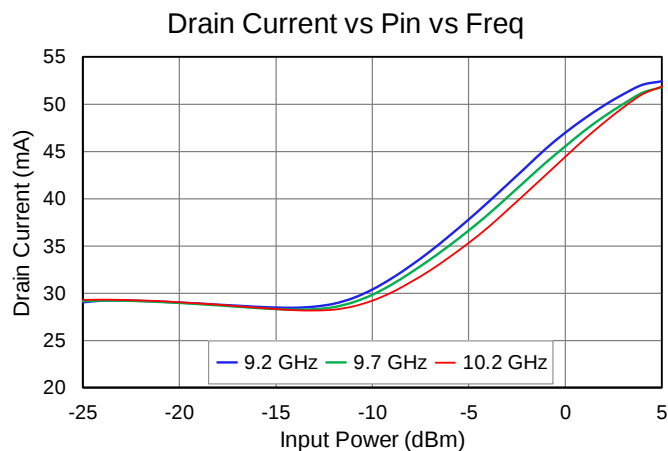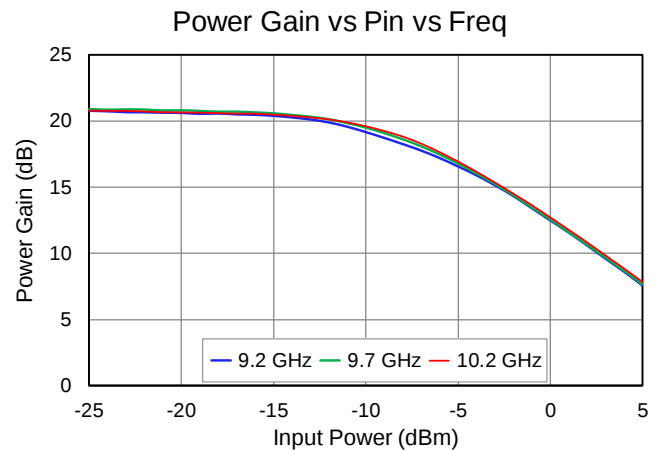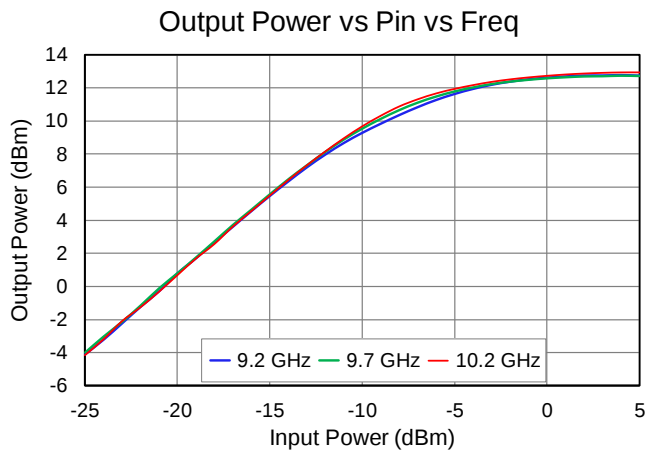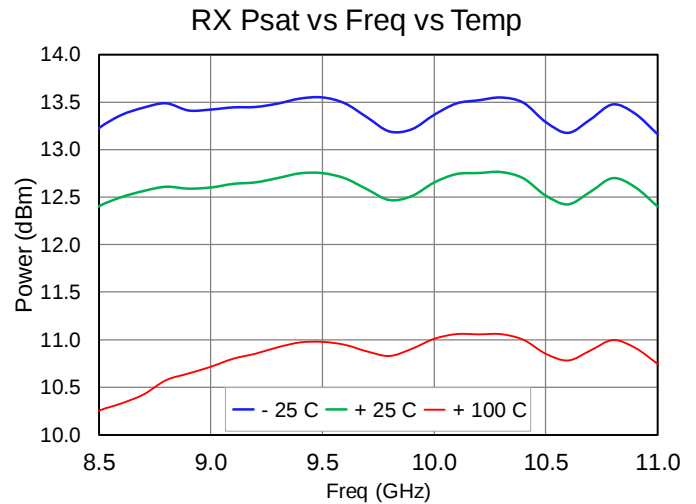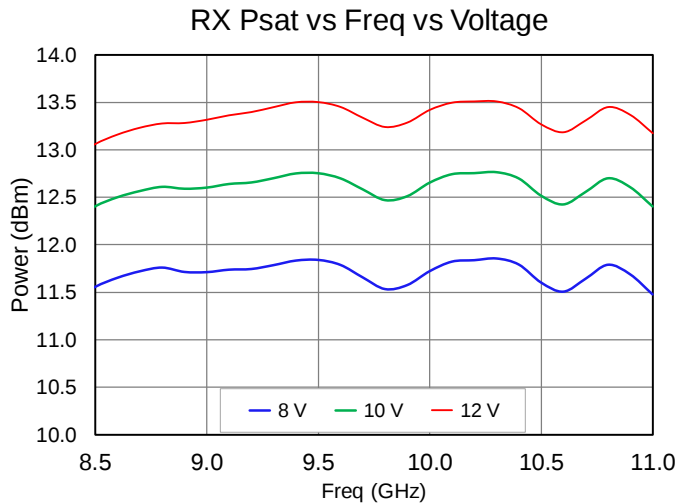







Performance Plots, Transmit Channel

Test Conditions unless otherwise stated: TXVD = 28 V, TXIDQ = 50 mA, TXVG fixed over temperature
RXSW = 0V, TXSW = -28 V, LNA off. Data de-embedded to device reference plane, 25C

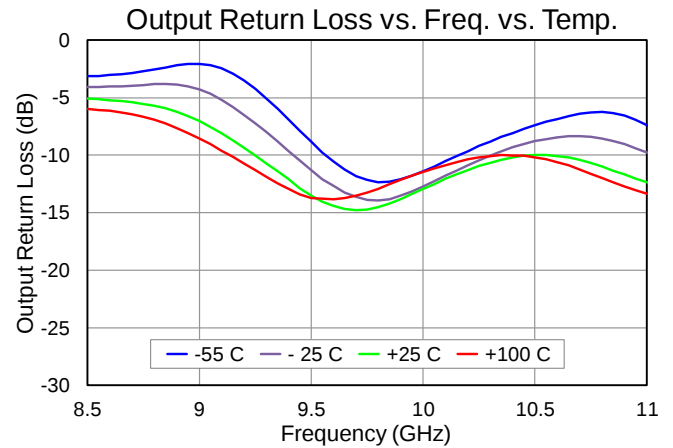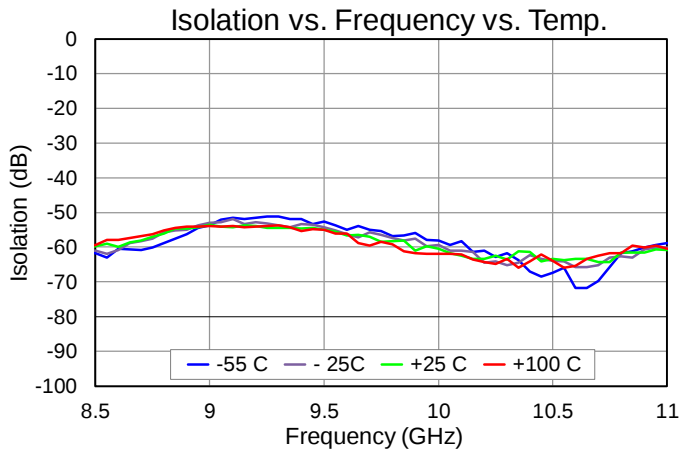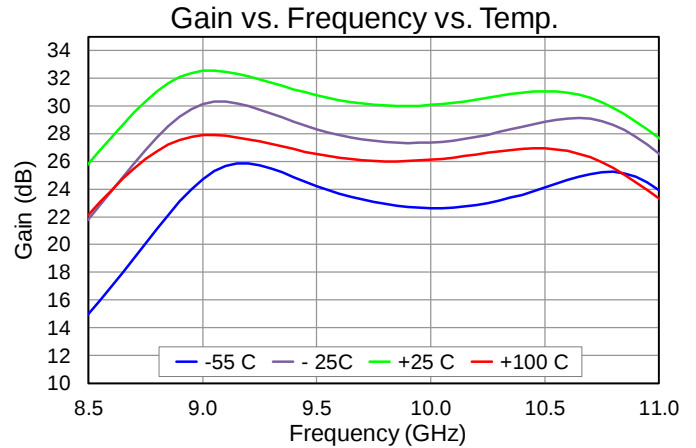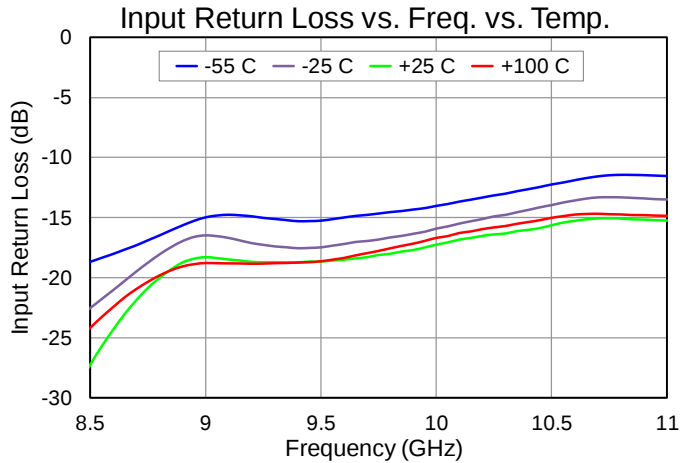







Performance Plots, Transmit Channel

Test Conditions unless otherwise stated: VD = 28 V, TXIDQ = 50 mA, TXVG fixed over temperature
RXSW = 0V, TXSW = -28 V, LNA off. Data de-embedded to device reference plane, 25C

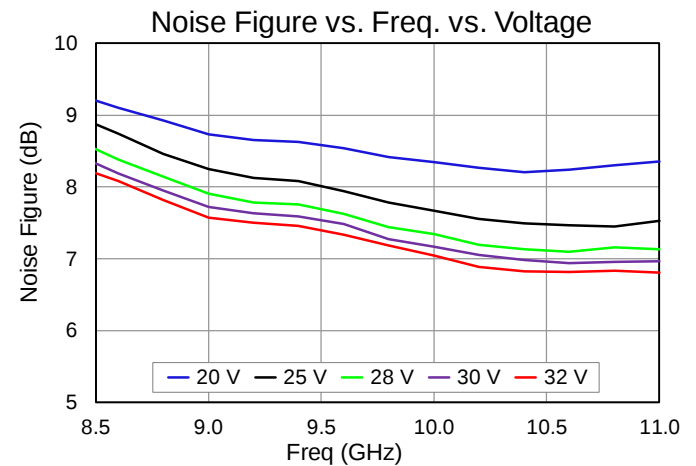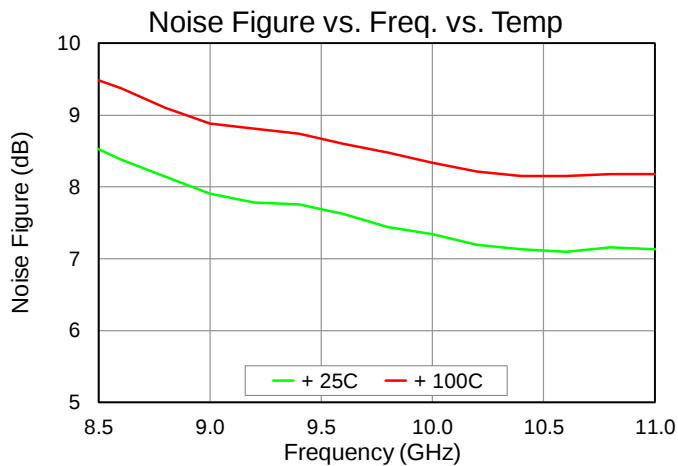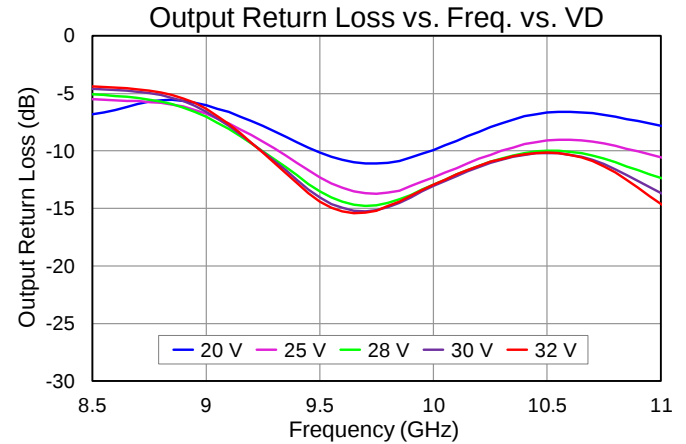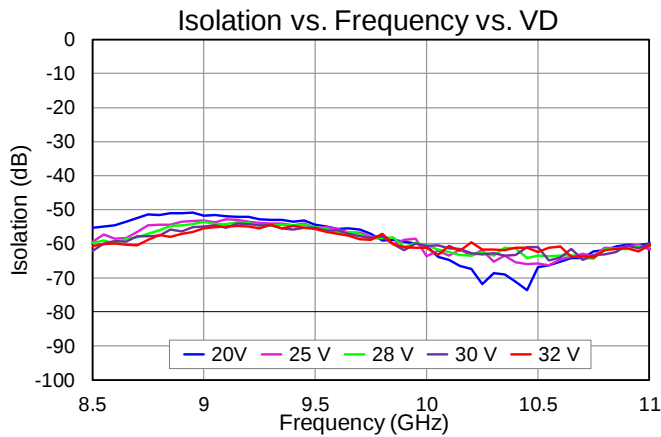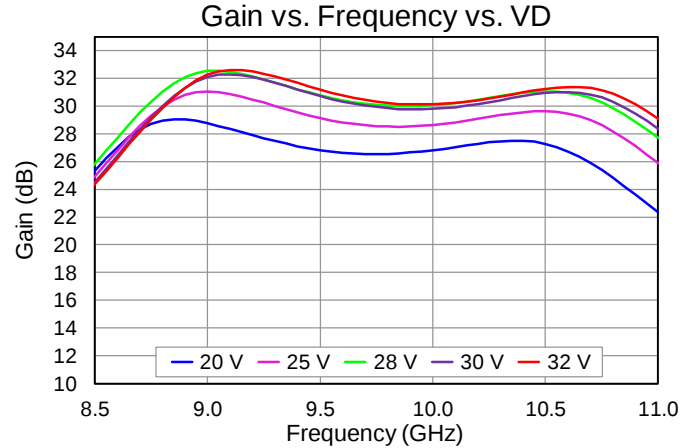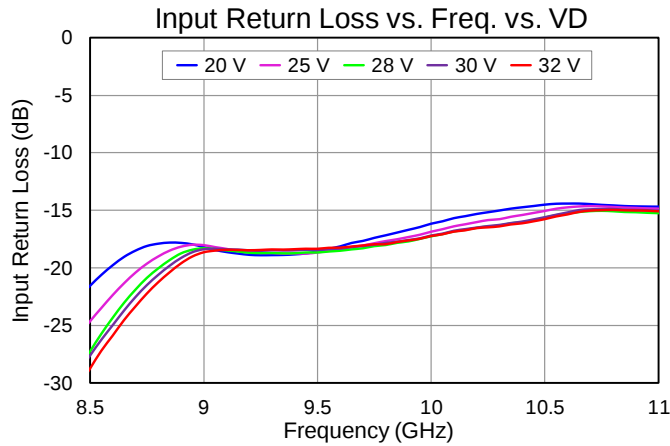





Performance Plots, Transmit Channel

Test Conditions unless otherwise stated: TXVD = 28 V, TXIDQ = 50 mA, TXVG fixed over temperature, RXSW = 0V
TXSW = -28 V, Pin = 13 dBm, PW = 200uS, DC = 10%, LNA off. Data de-embedded to device reference plane, 25C

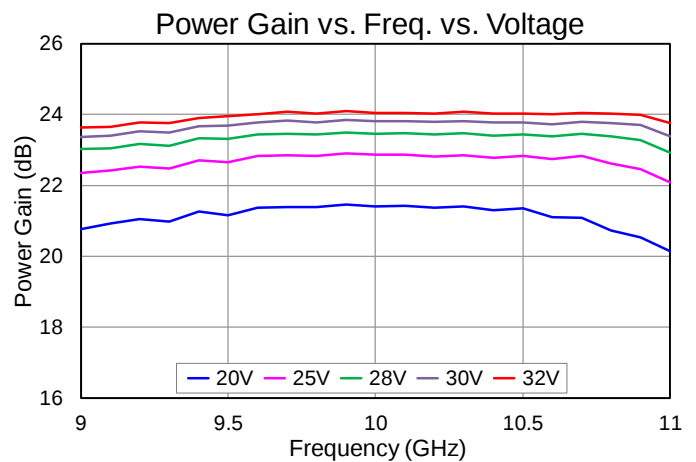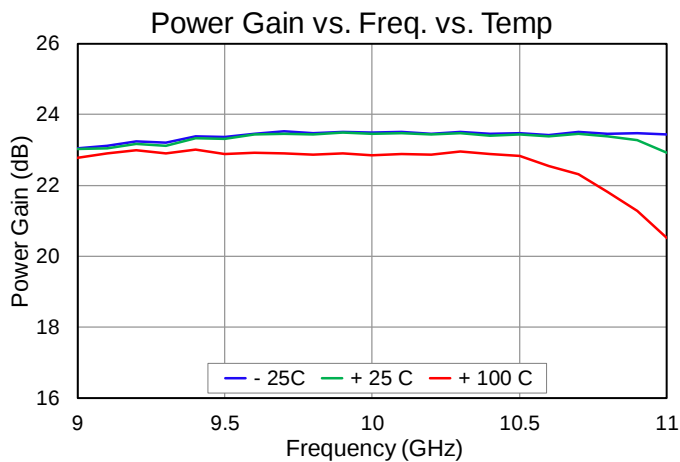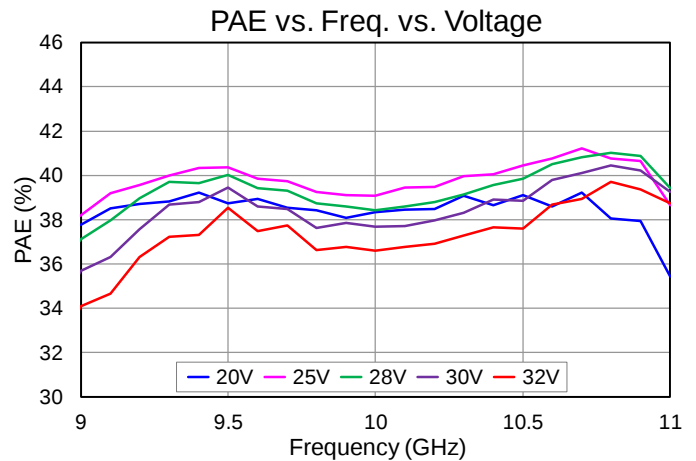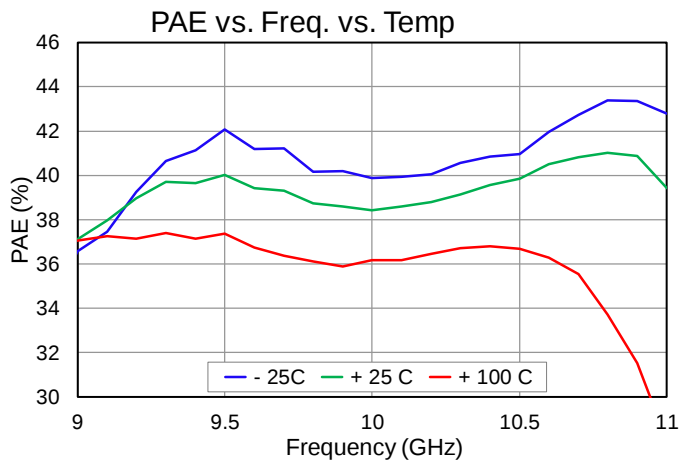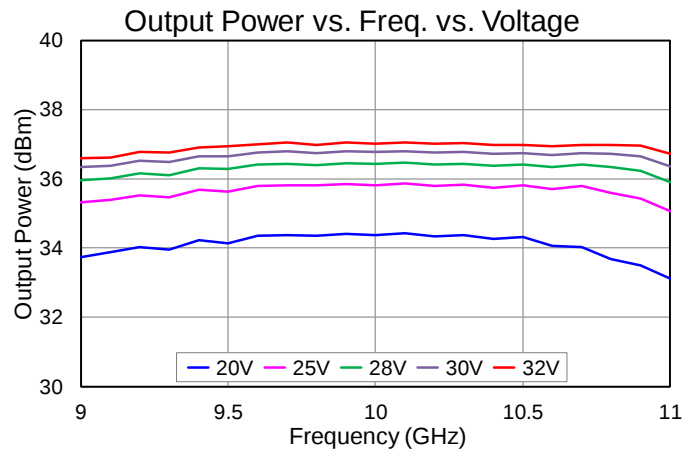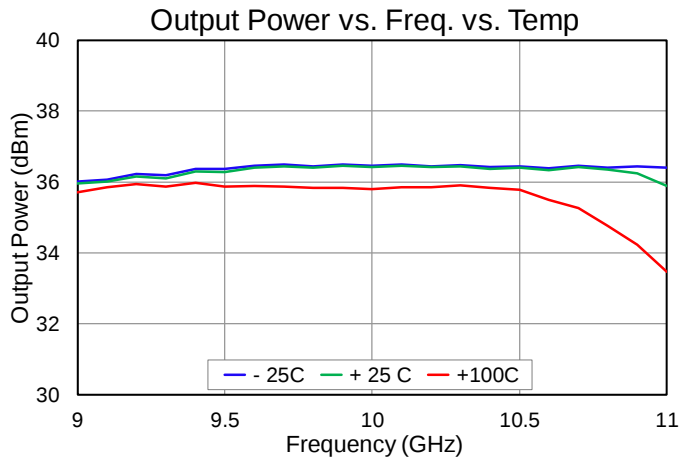







Performance Plots, Transmit Channel

Test Conditions unless otherwise stated: TXVD = 28 V, TXIDQ = 50 mA, RXSW = 0V, TXSW = -28 V
PW = 200 μ S, DC = 10%, LNA off. Data de-embedded to device reference plane, 25C

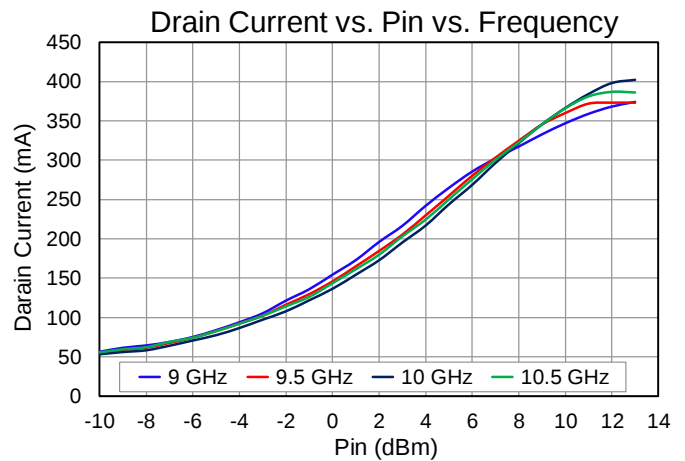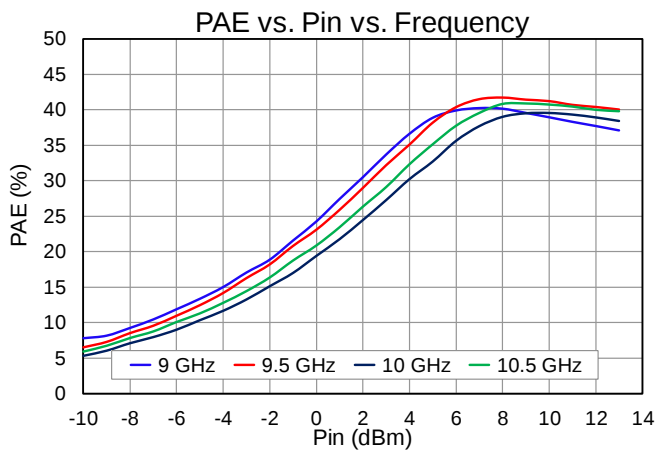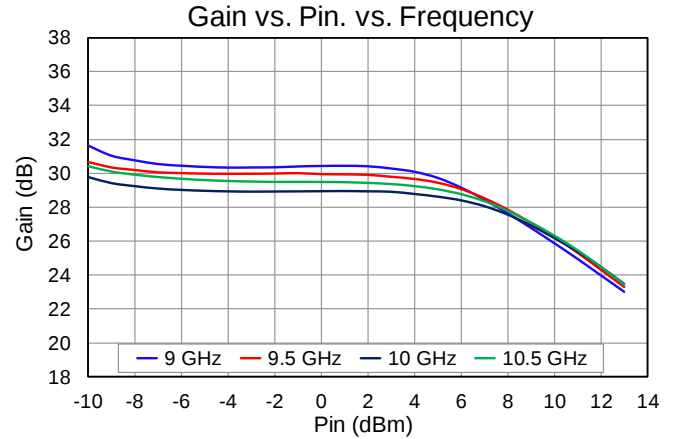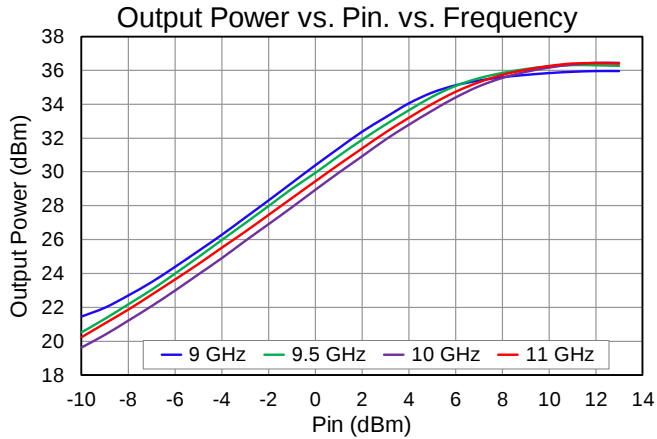


Performance Plots, Transmit Channel

Test Conditions unless otherwise stated: TXVD = 28 V, TXIDQ = 50 mA, TXVG fixed over temperature
RXSW = 0V, TXSW = -28 V, Freq: 10.2 GHz, LNA off. Data de-embedded to device reference plane, 25C

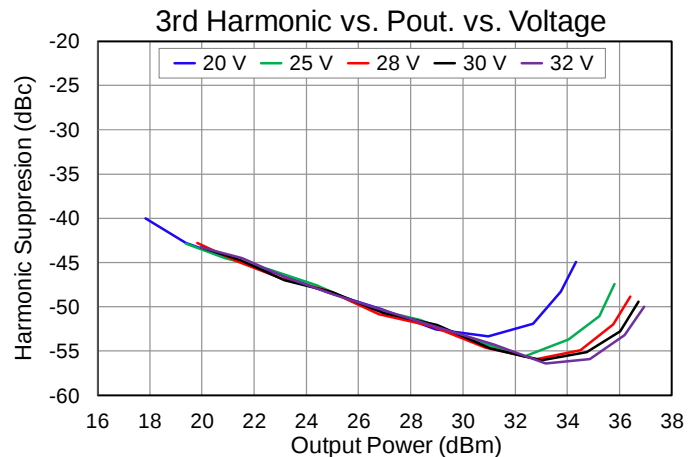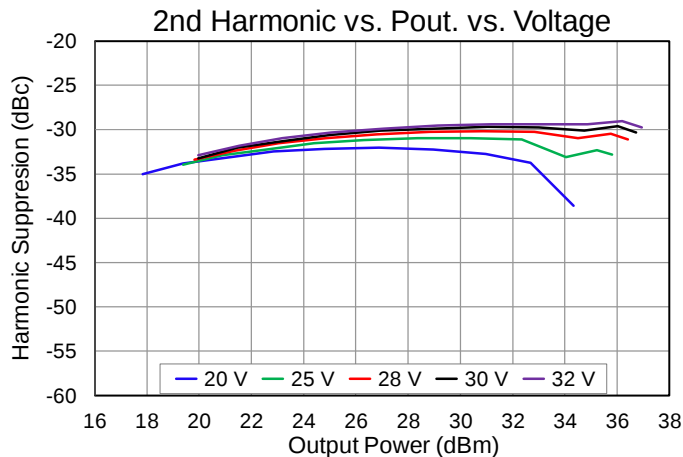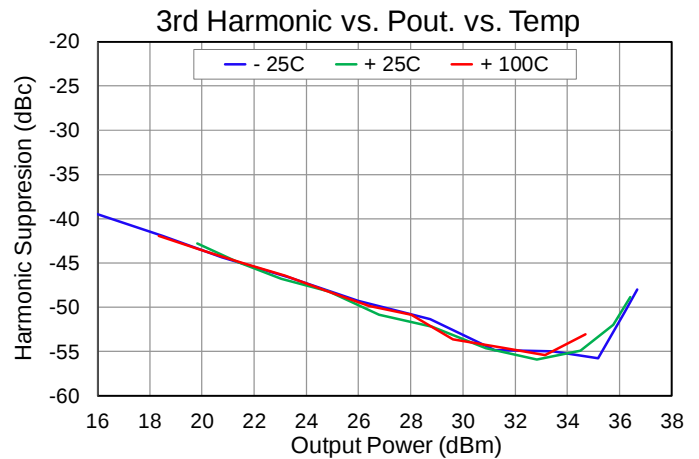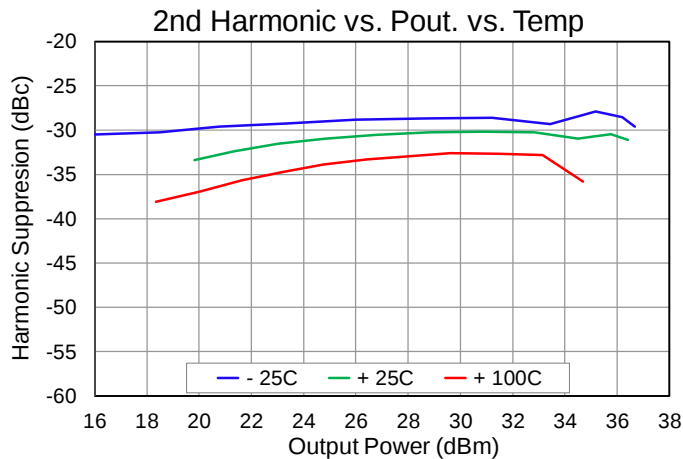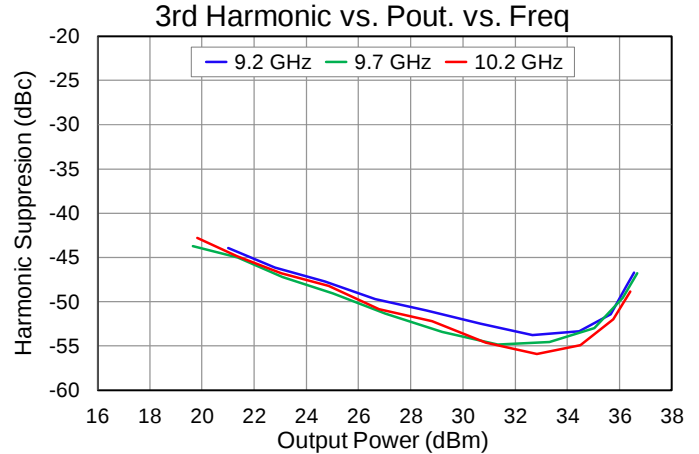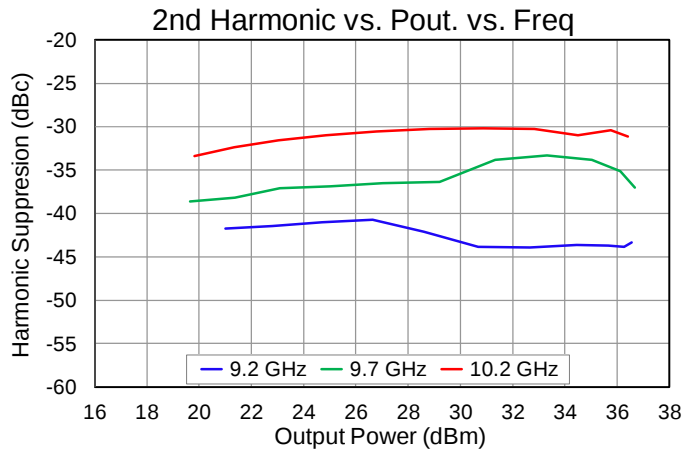

Application Circuit

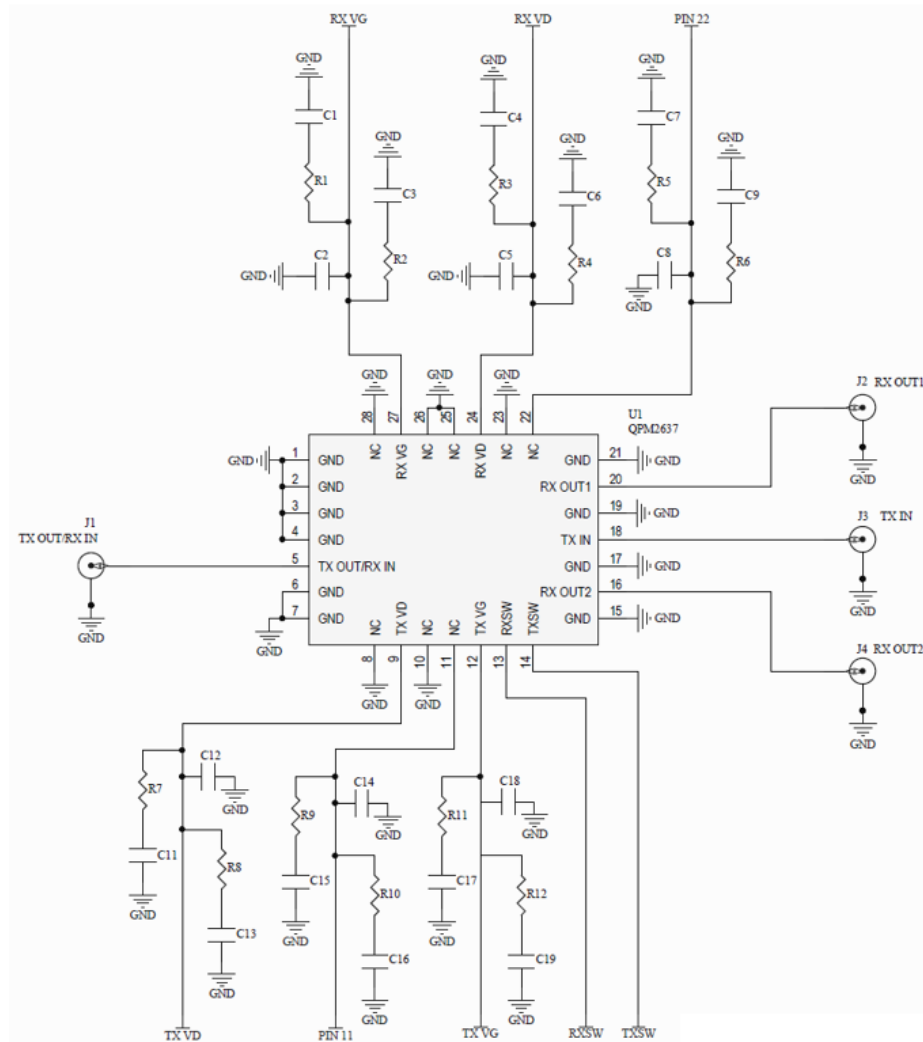


Bias-up Procedure

1. Set TXVD current limit to 600 mA, RXVD current limit to 60 mA, RXVG current limit to 10 mA, TXVG current limit to 100 mA, switch control current limit to 10 mA
2. Set RXVG and TXVG to -5 V (TXVG will draw ~50mA current)
3. Set TXSW = -28 V (or 0 V), RXSW = 0 V (or -28 V) for TX (RX) channel operation
4. Set RXVD = +10 V, TXVD = +28 V
5. Adjust TXVG, RXVG to achieve required drain current for TX and RX (-2.5 V Typical)
6. Apply RF signal

Bias-down Procedure

1. Turn off RF signal
2. Set RXVG, TXVG to -5 V
3. Set RXVD = 0 V, TXVD = 0 V
4. Turn off drain supply
5. Turn off TXSW, RXSW
6. Turn off gate supply


Mechanical Drawing & Pad Description

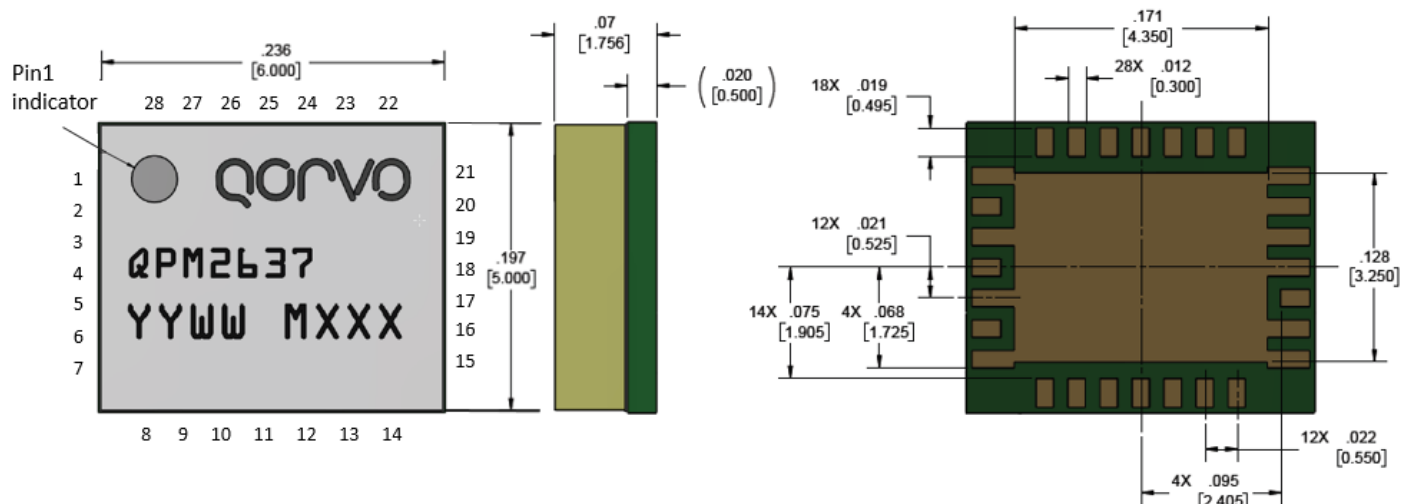

Dimensions in mm. Package lead finish: Ni / Au plating with minimum gold thickness of 0.1 um
 Part Marking: QPM2637: Part Number, YY = Part Assembly Year, WW = Part Assembly Week, MXXX = Batch ID

Pin Number	Label	Description
1, 2, 3, 4, 6, 7, 15, 17, 19, 21, Slug	GND	GROUND
5	ANT	Common Port to Antenna
9	TXVD	Transmit Drain Supply
12	TXVG	Transmit Gate Control
13	RXSW	Receive Switch Control
14	TXSW	Transmit Switch Control
16	RXOUT2	Receive Output 2
18	TXIN	Transmit Input
20	RXOUT1	Receive Output 1
24	RXVD	Receive Drain Supply
27	RXVG	Receive Gate Control
8, 10, 11, 22, 23, 25, 26, 28	N/C	No Internal Connections

Evaluation Board and Assembly

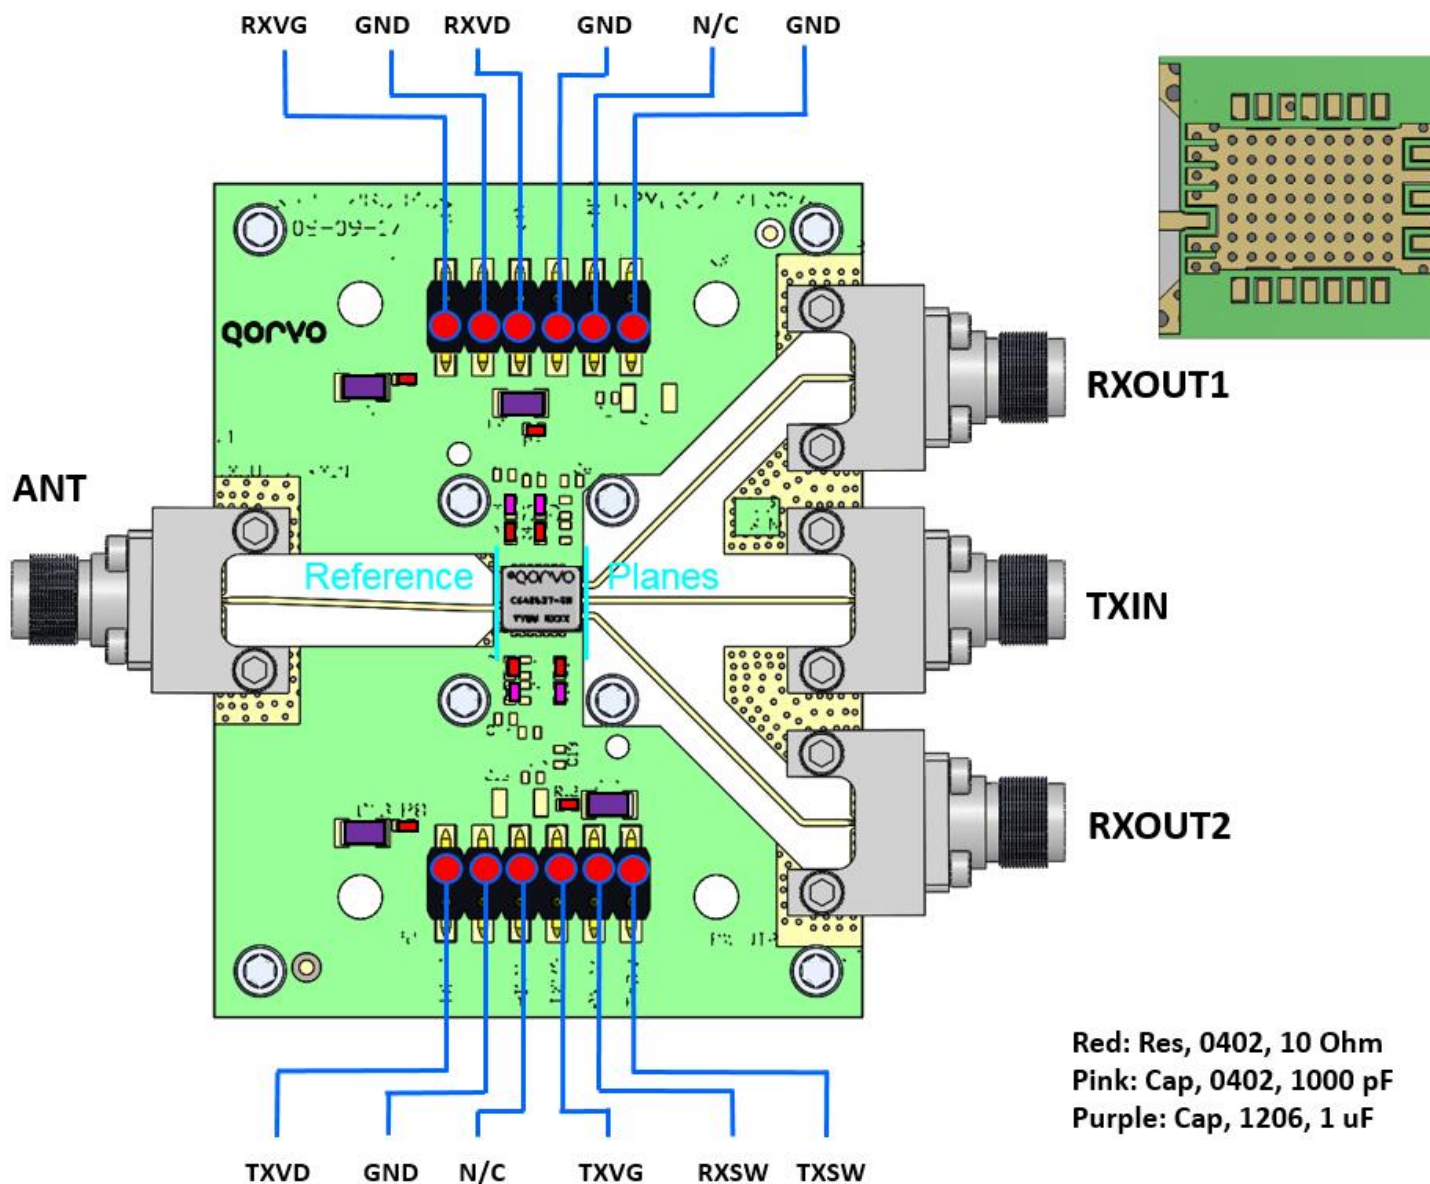

RF Layer is 0.008" thick Rogers Corp. RO4003C ($\epsilon_r = 3.35$). Metal layers are 0.5 oz. copper. The microstrip line at the connector interface is optimized for the Southwest Microwave end launch connector 1492-04A-5.

Ref. Des.	Component	Value	Manuf.	Part Number
C3, C6, C11, C17	SMT Cap.	CAP, 0402 1000pF +/-10% 50V 0402 X7R ROHS	Various	
C1, C4, C13, C19	SMT Cap.	CAP, 1206 1.0uF +/-10% 50V X7R ROHS	Various	
R1, R2, R3, R4, R7, R8, R11, R12	SMT Res.	RES, 0402 10 OHM, 5% 50V, ROHS	Various	

Absolute Maximum Ratings

Parameter	Value
Drain Voltage (TXVD and RXVD)	32 V
Drain Current (TXID)	600 mA
Drain Current (RXID)	60 mA
Gate Voltage (RXVG, TXVG)	0 to -5 V
Gate Current (RXIG)	20 mA
Gate Current (TXIG)	100 mA
Switch Control Voltage (TXSW, RXSW)	0 to -50 V
Switch Control Current	20 mA
RF Input Power (All RF ports, 85 °C)	36 dBm
Channel Temperature, T _{CH}	225 °C
Mounting Temperature (30 seconds)	260 °C
Storage Temperature	-55 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Thermal and Reliability Information

Parameter	Values	Units	Conditions
TX Channel, Thermal Resistance (θ_{JC}) ^(1,3)	6.92	°C/W	T _{BASE} = 100°C, TXVD = 28 V, TXIDQ = 50 mA TXID_DRIVE = 376 mA, P _{IN} = 13 dBm, Freq = 10GHz, P _{DISS} = 6.60 W (PA only, LNA off)
Channel Temperature (T _{CH})	145.70	°C	
RX Channel, Thermal Resistance (θ_{JC}) ⁽¹⁾	12.37	°C/W	T _{BASE} = 100°C, RXVD = 10 V, RXIDQ = 30 mA P _{DISS} = 0.3 W (LNA only, PA off)
Channel Temperature (T _{CH})	103.71	°C	


Notes:

1. Thermal resistance is measured to package backside
2. Base or ambient temperature is 100 °C
3. Transmit Channel, RF drive is under pulse drain supply condition, PW = 200 uS, DC = 10%, P_{DISS} and I_{D_DRIVE} are peak values.
4. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

Solderability

1. Compatible with the latest version of J-STD-020, Lead-free solder, 260 °C.
2. The use of no-clean solder to avoid washing after solder is recommended.


Recommended Soldering Temperature Profile

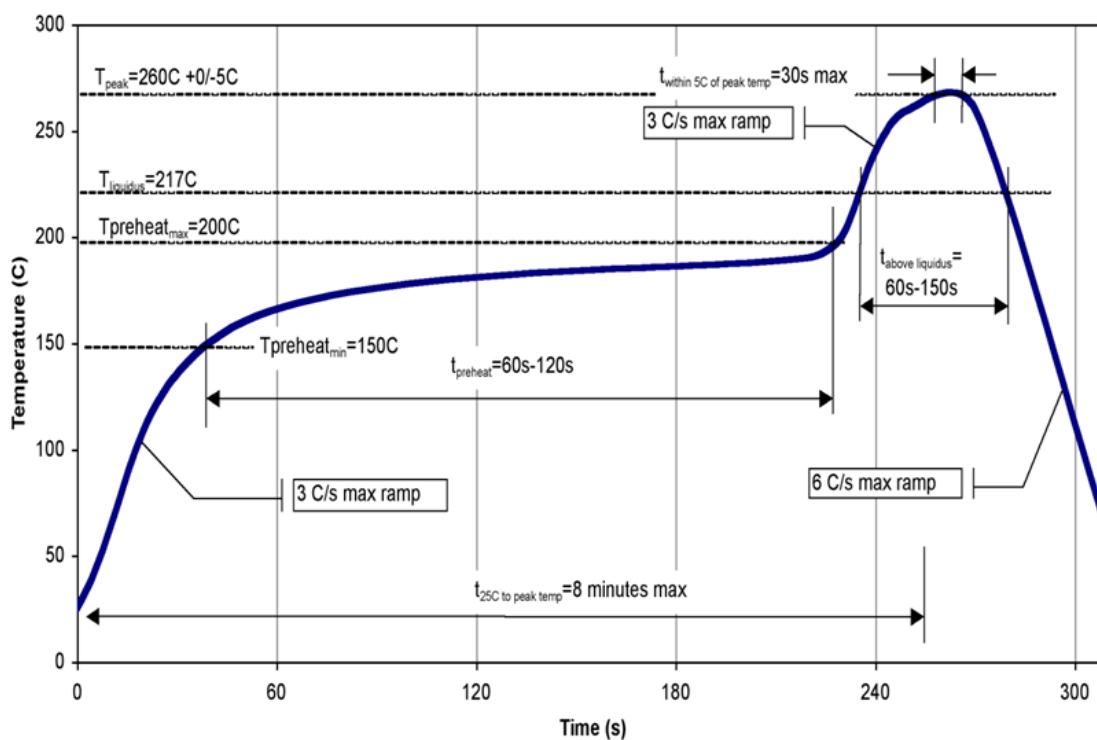

Tape and Reel Information

Standard T/R size = 50 pieces on a 7" reel.

Material		Cavity (mm)				Distance Between Centerline (mm)		Carrier Tape (mm)	Cover Carrier (mm)
Vendor	Vendor P/N	Length (A0)	Width (B0)	Depth (K0)	Pitch (P1)	Length direction (P2)	Width Direction (F)	Width (W)	Width (W)
Advantek	BCA389-A	5.30	6.30	2.1	8.0	2.00	5.50	12.0	9.20

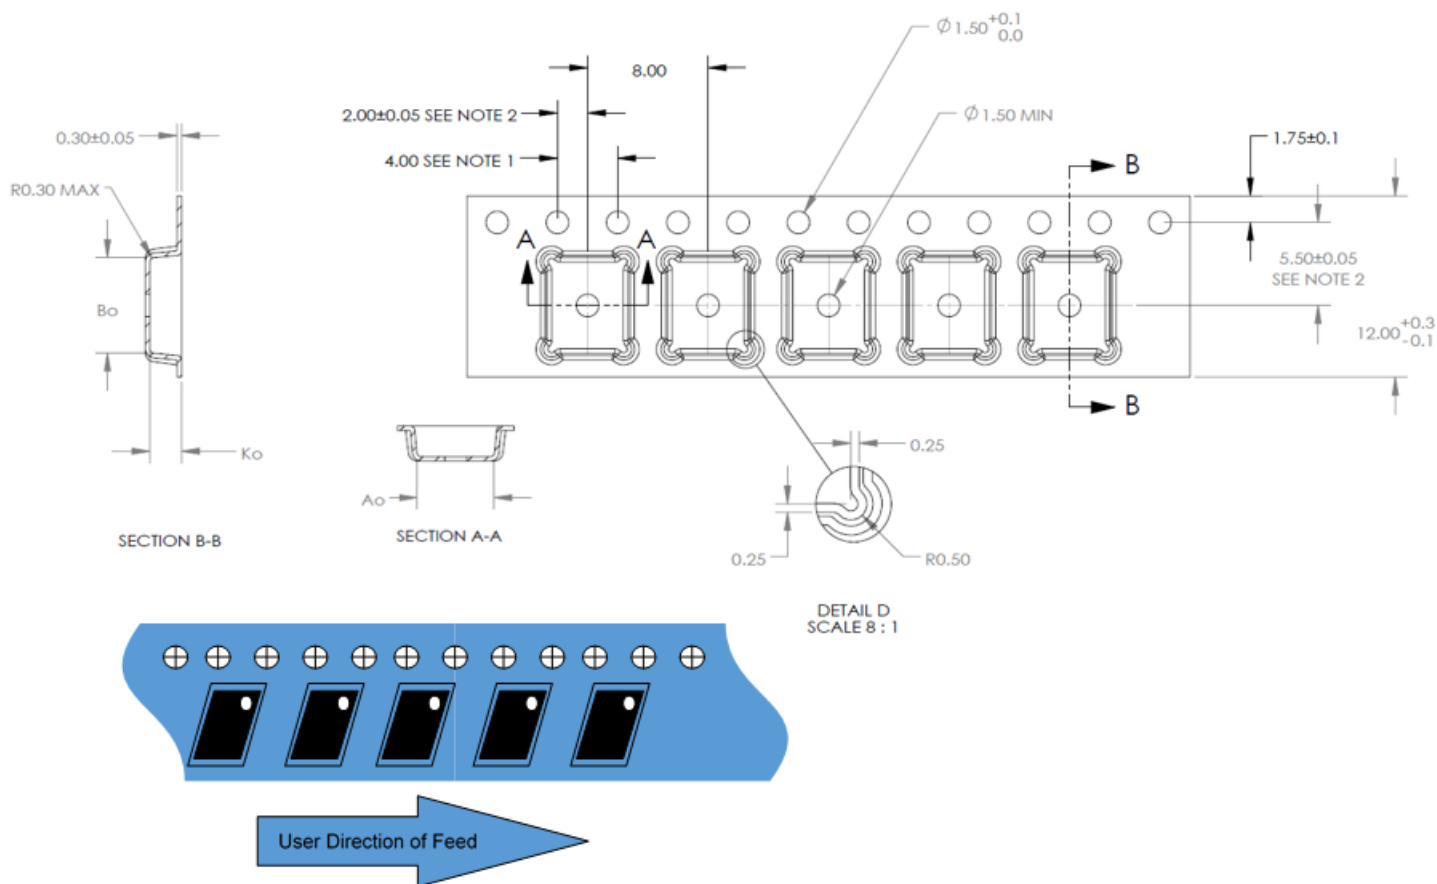

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	TBD	ESDA / JEDEC JS-001-2012
ESD – Charged Device Model (CDM)	TBD	ESDA / JEDEC JS-002-2014
MSL – Convection Reflow 260 °C	TBD	JEDEC standard IPC/JEDEC J-STD-020



Caution!
ESD-Sensitive Device

RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Tel: 1-844-890-8163

Web: www.qorvo.com

Email: customer.support@qorvo.com

For technical questions and application information: Email: appsupport@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2018 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.