



GORE® PHASEFLEX® Microwave/RF Test Assemblies

For High Density Test/
Interconnection

The Smallest, Lightest Internally Ruggedized Microwave/RF Test Assemblies


Performance you can gain at the price you can afford.
The new benchmark products for high density interconnection,
not only for RF and uW modular applications but also for high
speed digital test.

CHALLENGES

- Need for consistent repeatable measurements with stable electrical performance
- Wireless devices and aerospace systems are becoming more complex
- Increasing need for multiport testing
- Need to drive down the size and cost of test

TYPICAL APPLICATIONS

- Modular (PXIe, AXIe) test instruments
- RF switches
- Component/device R&D and production test
- High speed digital test
- 5G test and interconnection

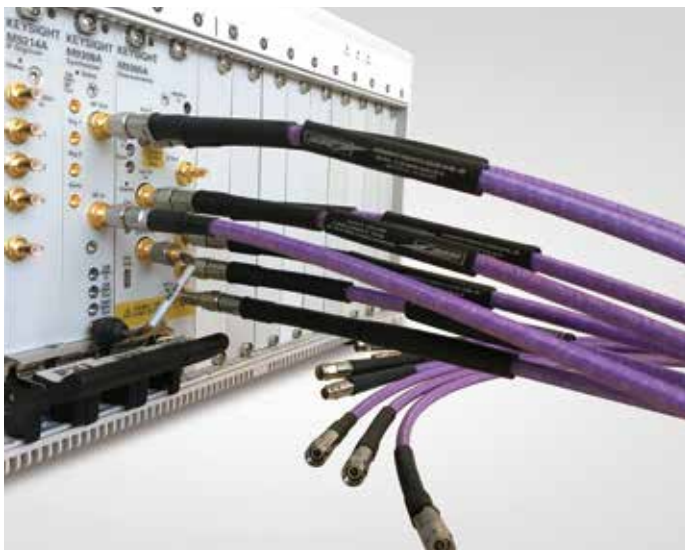


Typical application on PXIe test instrument



Benefits of GORE® PHASEFLEX® Microwave/RF Test Assemblies, ON Cables

- Consistent, repeatable measurements with stable electrical performance up to 18/26.5/40/50 GHz
- Longer service life with durable construction that resists crushing, twisting and kinking
- Enhanced phase and amplitude stability with flexure
- Lighter weight, smaller O.D. and more flexible
- Increased throughput and reduced downtime with durable and reliable performance

Figure 1: GORE® PHASEFLEX® Microwave/RF Test Assemblies - ON Cable Construction

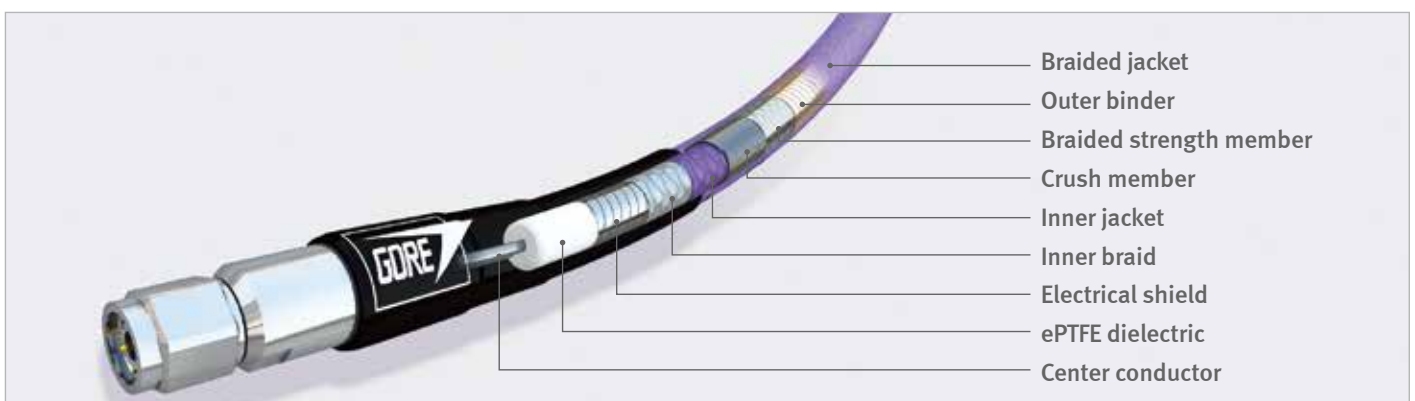



GORE® PHASEFLEX® Microwave/RF Test Assemblies

For High Density Test/Interconnection

TABLE 1: GORE CABLE TYPE ON SPECIFICATIONS¹

	Properties	Value			
Electrical Properties	Maximum Frequency (GHz)	18	26.5	40	50
	Typical VSWR	1.20:1	1.20:1	1.25:1	1.25:1
	Typical Insertion Loss (dB)	2.0	2.52	3.21	3.67
	Impedance (Nominal) (Ohms)	50			
	Typical Phase Stability (degree) ²	±2.0	±3.0	±5.0	±6.0
	Typical Amplitude Stability (dB) ²	± 0.05			
	Dielectric Constant (Nominal)	1.4			
	Velocity of Propagation (Nominal) (%)	85			
	Shielding Effectiveness (dB through 18GHz) ³	> 100			
	Time Delay (Nominal) [ns/cm (ns/in)]	0.04 (0.103)			
Mech./Env./ Properties	Center Conductor	Solid			
	Overall Diameter [mm (in)]	5.3 (0.210)			
	Nominal Weight [g/m]	68.9			
	Minimum Bend Radius [mm (in)]	25.4 (1.0)			
	Typical Flex Cycles ⁴	20,000	20,000	12,500	12,500
	Temperature Range (°C)	-55 to 125			
	Crush Resistance [kgf/cm (lbf/in)]	33.5 (187)			


¹ The electrical specifications in this table are based on a 0.91 m (36 in) assembly length and maximum frequency with straight connectors.

² Cable is wrapped 360° around a 57 mm (2.25 in) radius mandrel.

³ Per MIL-STD-1344, method 3008.

⁴ When bent ± 90° at a radius that is twice the minimum bend radius, test assembly performs reliably through the stated flex cycles.

Figure 2: Gore Cable Type ON Insertion Loss

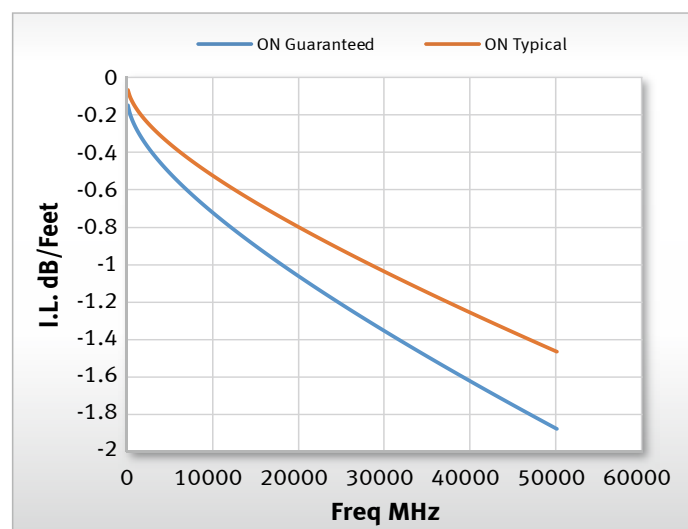



GORE® PHASEFLEX® Microwave/RF Test Assemblies

For High Density Test/Interconnection

CONNECTORS OUTLINE DRAWINGS

All dimensions are nominal inches (mm) unless otherwise specified.

Figure 3: SMA Connectors (Male and Female)

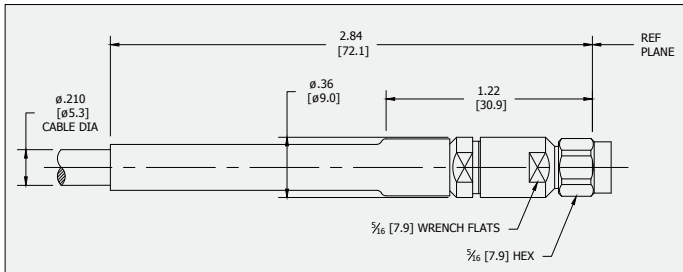


Figure 5: 2.92 mm (Male and Female)

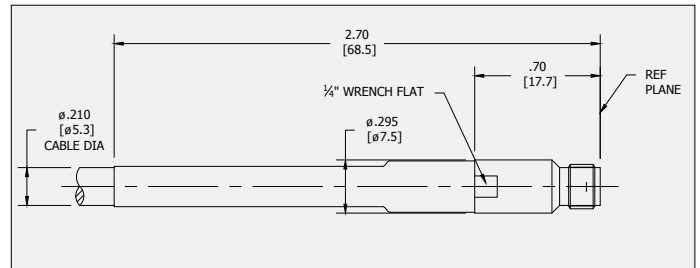
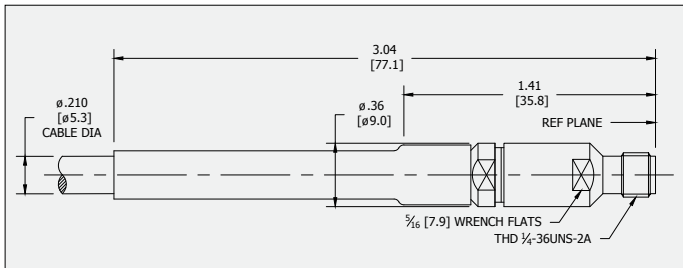
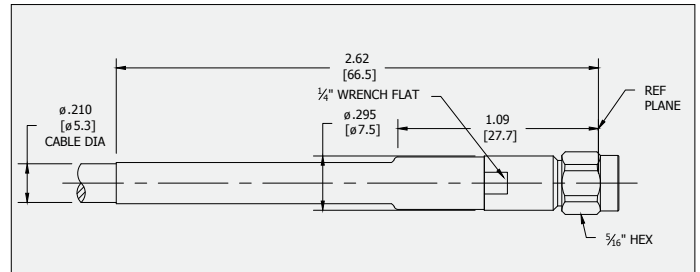


Figure 4: 3.5 mm Connectors (Male and Female)

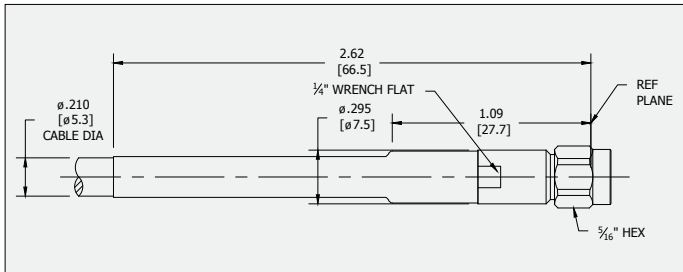


Figure 6: 2.4 mm Connectors (Male and Female)




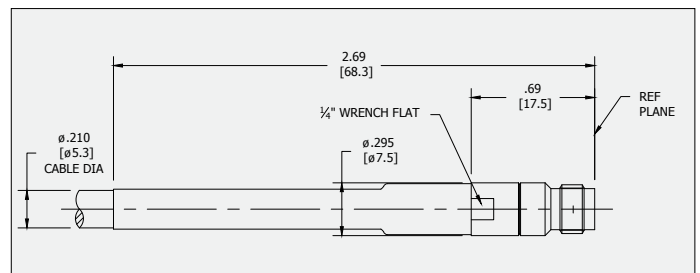


Figure 7: PN Connectors (Male)

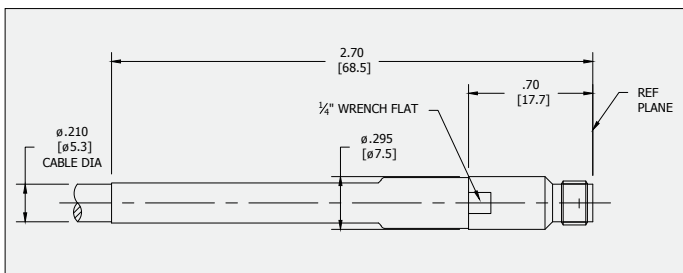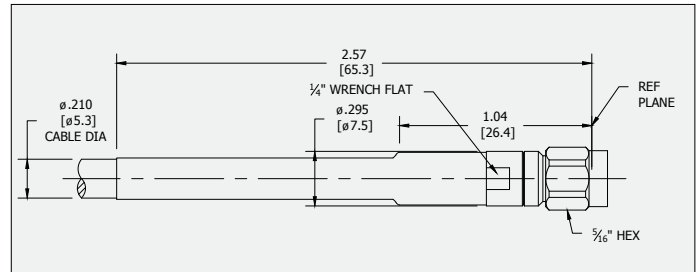

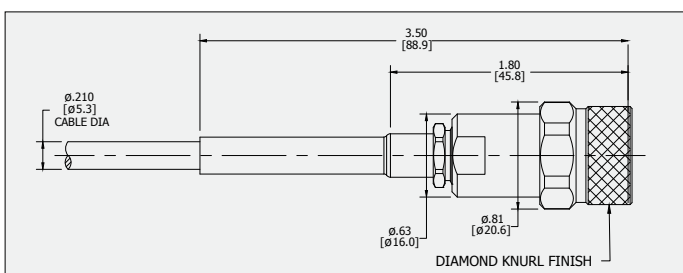

GORE® PHASEFLEX® Microwave/RF Test Assemblies

For High Density Test/Interconnection

TABLE 2: ORDERING INFORMATION FOR ON TEST ASSEMBLIES

Gore Part Number	Connector A	Connector B	Maximum Frequency (GHz)	Typical Application
ONR01Q01XXXX ¹	SMA Straight Male	PN Straight Male	18	Modular VNA
OND01Q01XXXX ¹	3.5mm Straight Male	PN Straight Male	18	Modular VNA
ONQ01Q01XXXX ¹	PN Straight Male	PN Straight Male	18	Modular VNA
ONR01R01XXXX ¹	SMA Straight Male	SMA Straight Male	18	Modular
ONR01R02XXXX ¹	SMA Straight Male	SMA Straight Female	18	Modular
OND01D01XXXX ¹	3.5 mm Straight Male	3.5 mm Straight Male	26.5	Modular
OND01D02XXXX ¹	3.5 mm Straight Male	3.5 mm Straight Female	26.5	Modular / VNA
ONOCQ0CQXXXX ¹	2.92 mm Straight Male	2.92 mm Straight Male	40	Modular/High Speed Digital
ONOCQ0CPXXXX ¹	2.92 mm Straight Male	2.92 mm Straight Female	40	High Speed Digital
ONOCK0CQXXXX ¹	2.4 mm Straight Female	2.92 mm Straight Male	40	High Speed Digital / VNA
ONOCJ0CQXXXX ¹	2.4 mm Straight Male	2.92 mm Straight Male	40	High Speed Digital
ONOCJ0CJXXXX ¹	2.4 mm Straight Male	2.4 mm Straight Male	50	Modular / High Speed Digital
ONOCJ0CKXXXX ¹	2.4 mm Straight Male	2.4 mm Straight Female	50	Modular / VNA

¹ "XXXX" refers to the cable length in inches , for example, 12 inches would be 0120.

ON cable assembly length options (inch): 12. 0, 24.0 , 36.0, 39.4, 48.0, 60.0, and 78.8. For customized length please consult Gore Sales.

NOTICE — USE RESTRICTIONS APPLY
Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.